

NOMA[®] MD

LED STRIP LIGHT

model no. 052-7846-2, 052-7848-8



LED DOUBLE STRIP LIGHT

model no. 052-7847-0, 052-7849-6



Toll-free: 1.866.827.4985

IMPORTANT: Please read this manual carefully and save it for reference

Instruction Manual

model nos. 052-7847-0, 052-7849-6 | contact us: 1.866.827.4985
 model nos. 052-7846-2, 052-7848-8

Preparation	2
Know Your Strip Light	3
Parts List	3
Assembly	4-6
Safety	6
Troubleshooting	7
Linking Feature	8
Care and Maintenance	8
Warranty	9

Please read and understand this entire manual before attempting to assemble, operate or install the product. Save these instructions so you can refer to them at a later time.

Before beginning assembly and installation of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble, install, or operate the product.

Note: Keep your receipt and these instructions for proof of purchase. Estimated Assembly Time: 45 minutes. Tools Required for Assembly (not included): wire strippers, safety goggles, ladder, gloves, flathead screwdriver, cross-head screwdriver, electrical tape and wire cutters.


READ AND SAVE THESE INSTRUCTIONS!







WARNING: RISK OF ELECTRIC SHOCK

Ensure the electricity to the wires you are working on is shut off. Either remove the fuse or turn off the circuit breaker before removing the existing light fixture or installing the new one.

- 1. Fixture Plate
- 2. Fixture Lens Cover

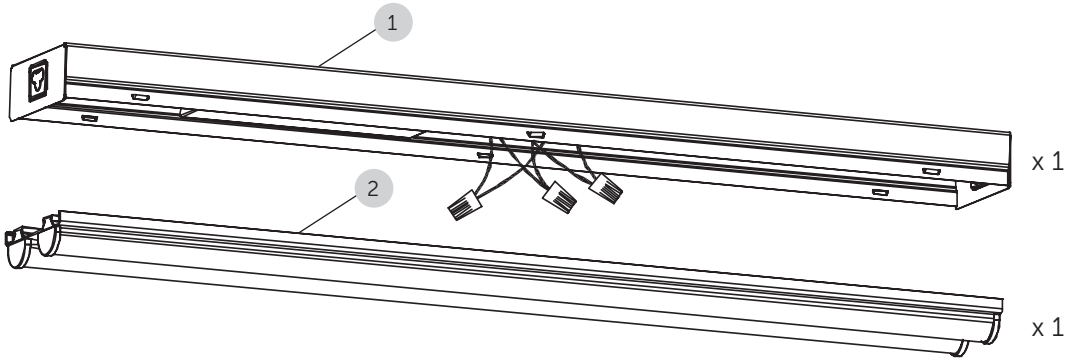

- 1. Drywall Anchor
- 2. Mounting Screw
- 3. Wire Connector
- 4. Linking Connector




NOTE


Hardware not shown actual size.

model nos. 052-7847-0, 052-7849-6 | contact us: 1.866.827.4985
 model nos. 052-7846-2, 052-7848-8


- With power disconnected to your electrical box, remove the existing fixture. Make a sketch of how the current fixture is wired (by wire color) or mark the wires with masking tape and a pencil so you will know how to properly reconnect the wires to the new LED light fixture.

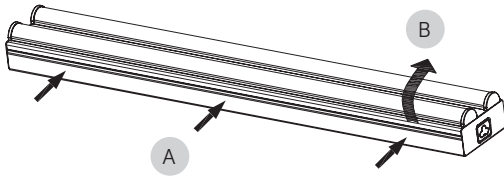


1. Press the bottom frame of the fixture plate (A) inward, in the direction of the arrows, and lift the fixture lens cover (B) with the other hand as indicated.

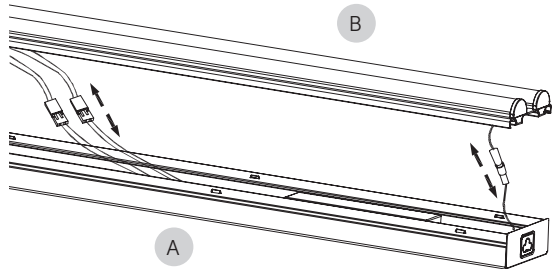


2. After dividing the light fixture into the fixture plate (A) and fixture lens cover (B), unplug the connectors to separate the terminal wires and ground wire inside the light fixture.

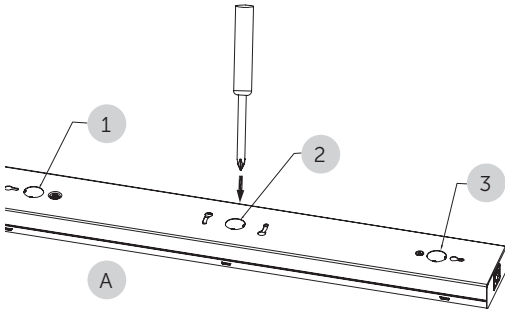


3. Turn over the fixture plate (A). Using a screwdriver, punch out one of the 3 large holes (1, 2, or 3) for wiring based on the installation position.

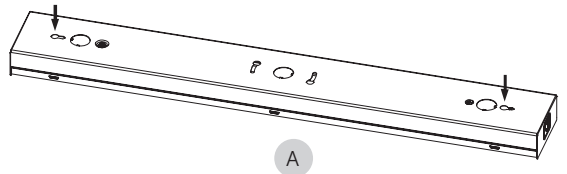


4. Mark the two keyhole mounting positions of the fixture plate (A) on the ceiling. Drill a hole in the ceiling for each of the two mounting holes.

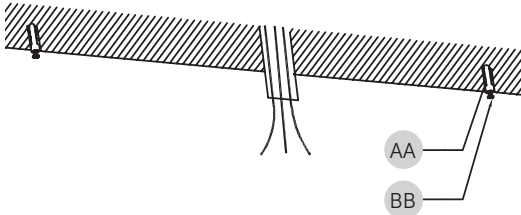


5. Install a plastic drywall anchor (AA) and a mounting screw (BB) in each drilled mounting hole.

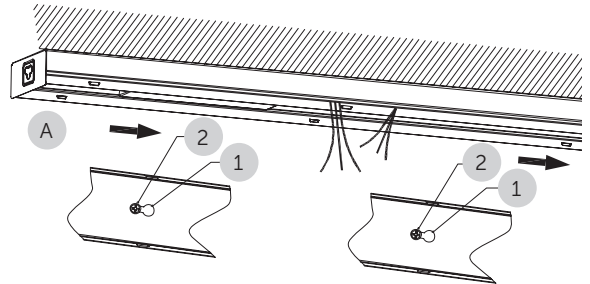

6. Align the 2 mounting keyholes on the fixture plate (A) with the 2 mounting screws in the ceiling. Once both screw heads are through the large ends of the keyholes (position 1), slide the fixture plate to the right until the heads of the screws slide into the narrow ends of the keyholes (position 2). Use a screwdriver to tighten the mounting screws.

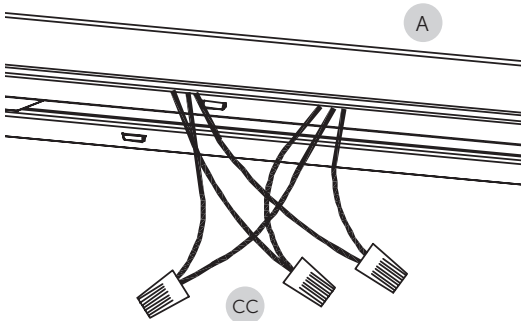


7. Connect the wires from the fixture plate (A) to the wires from the ceiling. Follow the sketch or markings created when removing the old fixture to connect wires of the same type or color, including the ground wire. Cover the wire connections using the wire connectors (CC).

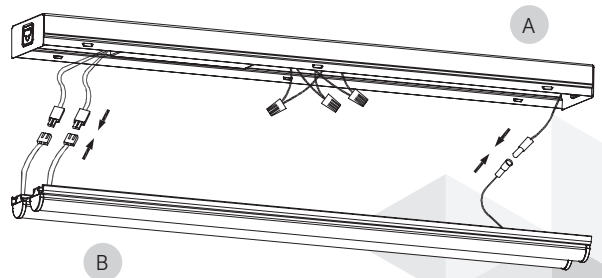


8. Connect the top and bottom parts of the connectors for the terminal wires in the light fixture, including the ground wire of the fixture.

model nos. 052-7847-0, 052-7849-6 | contact us: 1.866.827.4985
 model nos. 052-7846-2, 052-7848-8

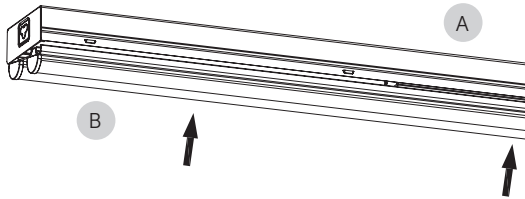

9. Snap the fixture lens cover (B) onto the fixture plate (A). Restore power to the electrical box. Turn on the light switch to activate the fixture.

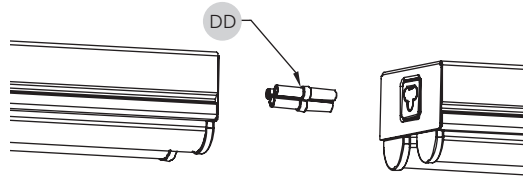

10. Multiple light fixtures can be connected end-to-end, up to the maximum length shown below. Only the first light fixture needs to be hardwired. Each additional fixture is then mounted to the ceiling and connected using the linking connector (DD).

CAUTION:

1. If you are unfamiliar with electrical installations, it is recommended you contact a qualified electrician to do the installation.
2. For indoor use only.
3. Suitable for damp locations.
4. Do not install inside enclosed cabinets.
5. Do not mount over stoves.
6. Do not leave bare wires exposed outside of the electrical connections.
7. Do not use this fixture with a dimming circuit. If you currently have dimmer controls, you will need to remove them and replace them with regular electrical switches.

Before doing any work on the fixture, disconnect power to the light fixture. Minor problems often can be fixed without the help of an electrician.

Problem	Reason	Solution
The fixture will not light.	The power is off.	Check to ensure the power supply is on.
	The circuit breaker is off.	Check to ensure the circuit breaker is in the on position.
	There is a bad connection.	Check to ensure proper wire connections are made. Contact a qualified electrician.
	There is a defective switch.	Contact a qualified electrician.
The fuse blows or circuit breaker trips when the light is turned on.	The wires are crossed or the power wire is grounding out.	Check to ensure proper wire connections are made. Contact a qualified electrician.

NOTICE:

This device complies with Industry Canada's license-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

model nos. 052-7847-0, 052-7849-6 | contact us: 1.866.827.4985
 model nos. 052-7846-2, 052-7848-8

Product

Linkability

Item # 052-7848-8 – 2 ft. (61 cm.)
 LED Strip Light

Connect up to 30 2 ft. (61 cm.)
 1-light strips

Item # 052-7846-2 – 4 ft. (1.2 m.)
 LED Strip Light

Connect up to 15 4 ft. (1.2 m.)
 1-light strips

Item # 052-7849-6 – 2 ft. (61 cm.)
 LED Double Strip Light

Connect up to 15 2 ft. (61 cm.)
 2-light strips

Item # 052-7847-0 – 4 ft. (1.2 m.)
 LED Double Strip Light

Connect up to 7 4 ft. (1.2 m.)
 2-light strips

CAUTION:

Before attempting to clean the fixture, disconnect the power to the fixture by turning the breaker off or removing the fuse from the fuse box.

This LED light fixture is made from quality materials that will last many years with minimum care. You may want to periodically clean the fixture with a soft cloth. To maintain the best appearance of the fixture, do not use cleaners with chemicals, solvents, or harsh abrasives. Do not use liquid cleaner on the LEDs, LED driver, or wiring inside the light fixture.

NOMA[®] MD

This product carries a three (3) year warranty against defects in workmanship and materials. Noma Canada agrees to replace a defective product, within the stated warranty period, when returned to the place of purchase with proof of purchase. This product is not guaranteed against wear or breakage due to misuse and/or abuse.

Warranty



Made in China

Imported by
Noma Canada, Toronto, Canada M4S 2B8