



Single Sink

063-3402-6

Installation Instructions

Package Contents

Sink	Strainer	Installation Instructions	Clip	Template
1	1	1	1	1

Please carefully read instructions before beginning installation.

Note: It is recommended that all countertops be cut by an approved or certified installer and that the sinks be installed by a certified installer whenever possible. The countertop/sink unit should be installed at the same time.

TOOLS AND MATERIALS REQUIRED:	
Eye protection (safety glasses/goggles) is strongly recommended	Long, thin screwdriver
Ear protection is strongly recommended	Tape measure
Drill and drill bit	Pencil (NOT permanent marker)
Hacksaw/jigsaw	Appropriate sealant for countertop material
Wood braces	Rags
Be sure to use proper tools and always wear personal safety devices for your protection.	

Step 1

Remove your old sink and check the countertop cut-out opening to be sure it is sized properly. The easiest way to do this is to set the new sink into the opening to see if it fits.

Step 2


If you are installing the sink on a new countertop, please follow the directions as below.

Step 3

Place the template on the countertop in desired position and trace completely using a pencil.


Step 4

Drill hole at the inside corner of the cutout line. Using a saber saw, start cutting from the drilled hole along the cutout line. Support cutout until the cut is completed.

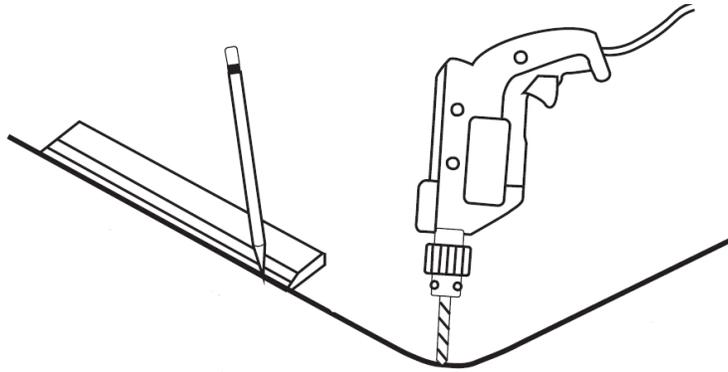

Step 5

Set the sink temporarily into the cutout opening to verify the fit. The sink rim must set uniformly on the countertop. If the sink does not fit, enlarge the cutout opening carefully.

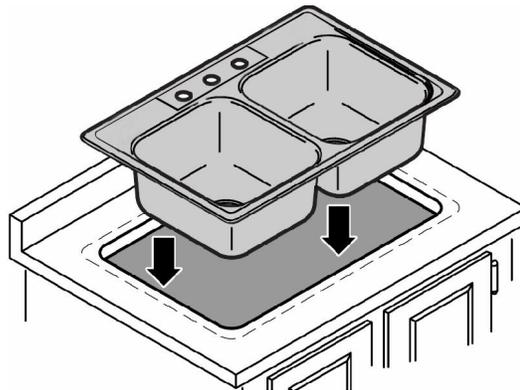

Step 6


Install faucets and other accessories such as a side spray or soap/lotion dispenser onto the sink.

Step 7

Attach and space the clips around the underside of the sink. Number of clips vary between models and be sure to arrange spacing evenly around the sink. And then apply sealant around the sink rim to serve as a watertight seal.


Step 8

Lower the sink into the hole carefully and tighten the clip evenly.

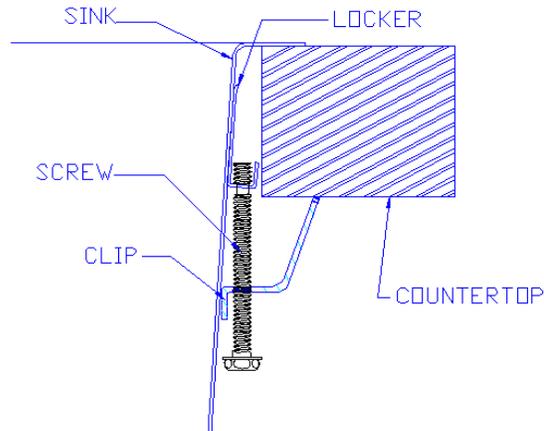

Step 9

Wipe away the excess sealant and allow it to dry. Make the drain connections. Run water into the sink and check for leaks.

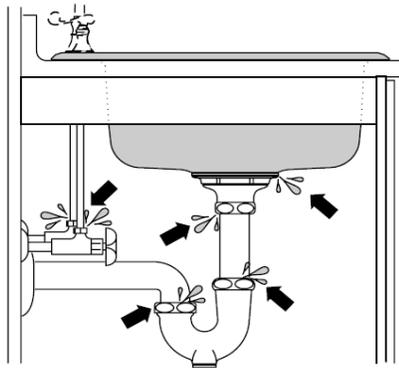

Care and Cleaning

Cleaning

- Clean regularly with a mild detergent solution and/or clean water applied with a soft cloth or sponge. Rub gently.
- Rinse and wipe the sink dry after every use to prevent water spotting and mineral deposits in severe hard water conditions.
- Deep clean once a week with a recommended cleanser (be sure to rub in the direction of the

finish lines) and a soft cloth or sponge rather than aggressive cleaning.

Please note that chlorides are found in almost all soaps, detergents, bleaches and cleansers. Chlorides can be harsh on stainless steel. Rinse your sink thoroughly after each use to remove any chloride residue.

Scratches

Scratches are inevitable during your usage over time. Use a nylon pad with an iron free abrasive polishing compound. Follow the original polish lines to blend out the scratch in a small area. Avoid scrubbing too vigorously, as you may leave a bright spot.

Things to avoid:

- Do not use any abrasive cleaners such as steel wool or scrub pads.
- Do not leave wet sponges, cloths, cleaning pads, rubber mats or dishpans in the sink. This could lead to surface rust or pitting.
- Do not leave standing solutions of chlorine bleach and water in the sink for extended periods of time. Always rinse the sink after using such solutions.
- Do not allow liquid soap or other cleansers to dry on the surface of the sink.

Imported by Trileaf Distribution Trifeuil Toronto, Canada M4S 2B8